


SX Grid 3030

Biaxial Geogrid Polypropylene - 4m x 50m roll (other roll sizes available)

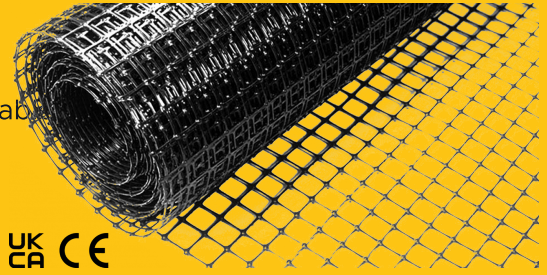

UK
CA CE

PRODUCT NAME	DESCRIPTION
SX Grid 3030	Biaxial Geogrid Polypropylene - 4m x 50m roll (other roll sizes available)

SPECIFICATION

General information

Stock code	GGSXGRID/30
Range	SX Grid
Third party certified	CE UKCA

Details

Roll size	50m	
Tensile strength (MD)	EN ISO 10319	30kN/m ²
Tensile strength (CMD)	EN ISO 10319	30kN/m ²
Tensile load (2% strain) (MD)	EN ISO 10319	10.5kN/m
Tensile load (2% CMD)	EN ISO 10319	10.5kN/m
Tensile load (5% strain) (MD)	EN ISO 10319	21kN/m
Tensile load (5% CMD)	EN ISO 10319	21kN/m
Junction efficiency	95%	
Aperture opening size	40 mm x 40 mm	

NOTES

Roll sizes:

- 4m x 50m
- 4.5m x 50m
- 5.2m x 50m

1 All strength and load figures are based on test results from manufacturer's laboratory, measured in accordance with ISO 10319 at the temperature of $21\pm 1^{\circ}\text{C}$ and calculated as a lowest 95% confidence limit in accordance with ISO 2602.

2 Measured by comparing the results of tests in accordance with test methods GRI/GG2 and GRI/GGI.

3 Carbon Black content 0.5%.

4 Other roll sizes are available to order.

1. Wrekin Products Ltd is continually seeking to improve our products and therefore reserves the right to alter product specifications without prior notice.

2. It is the responsibility of all users to satisfy themselves the above data is current.

3. Installation details are available on request.

